





**nosstec**

# BENDING ROLL MACHINE 4132

A manually operated machine with crowned rolls. The lower roll is adjusted by means of a hand wheel on the right-hand side of the machine. The bending roll can be set diagonally for cone bending. The lower and rear rolls have four different slots for the bending of wire.

- ▶ Top roll can be swung out
- ▶ Cone bending as standard
- ▶ Reduction gear available for increased power
- ▶ Bending roll adjusted by lever
- ▶ Crowned rolls
- ▶ Medium duty production

# MANUAL

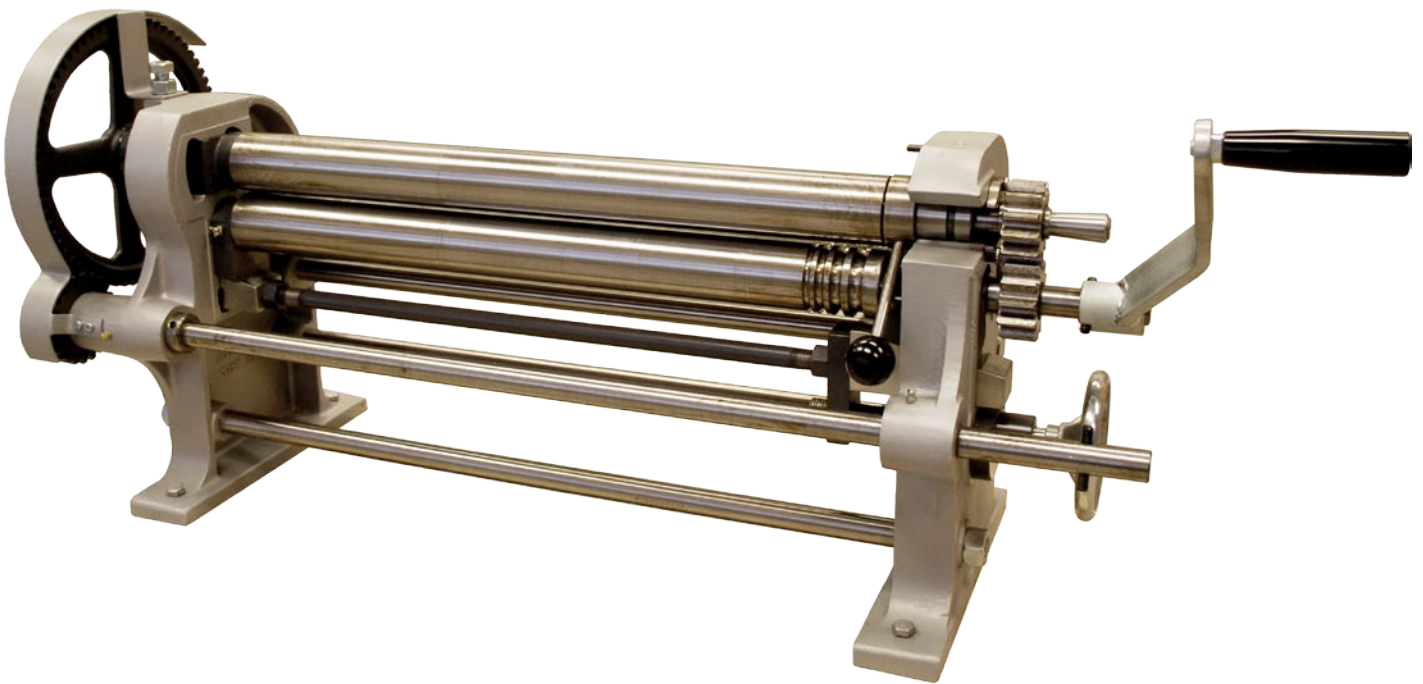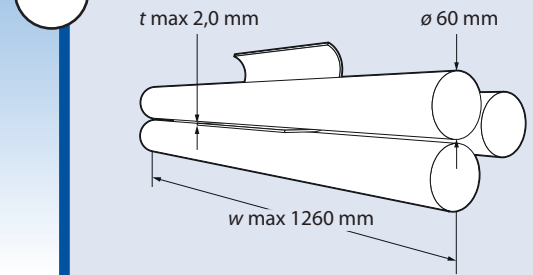

Art.no.	4132	-0620	-1015	-1212
Capacity		6/20	10/15	12/12
Working length ( <i>w</i> )	mm	675	1010	1260
Max sheet thickness (400N/mm <sup>2</sup> ) ( <i>t</i> )	mm	2,0	1,5	1,25
Diameter of rolls ( $\varnothing$ )	mm	60	60	60
Net weight	kg	140	175	215
<b>OPTIONS:</b>				
Stand	4132	-0458	-0508	-0607



Nosstec AB, Kristineholmsvägen 12, 441 39 Alingsås, SWEDEN

Tel: +46 (0)512 - 298 85 • Fax: +46 (0)512 - 298 89 • E-mail: info@nosstec.se • Web: www.nosstec.se

For copyright reasons all reproduction and copying of the texts, photos, tables and illustrations is prohibited without written permission from Nosstec AB.