




nosstec


BENDING ROLL MACHINE 8263

Suitable for production of less demanding profiles, the 8263 is a manually operated machine made of cast iron. The lower rolls are fixed mounted while the upper roll is adjustable by means of two screw spindles. One side bracket can be bent outwards for the removal of finished piping.


- ▶ Basic and robust
- ▶ Cone bending optional
- ▶ Crowned rolls
- ▶ Heavy duty production



MANUAL

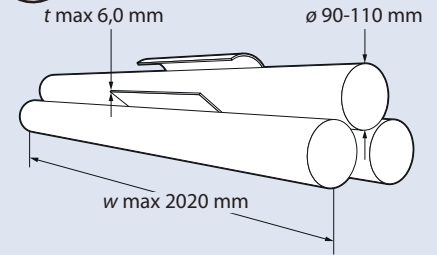

Cone bending equipment

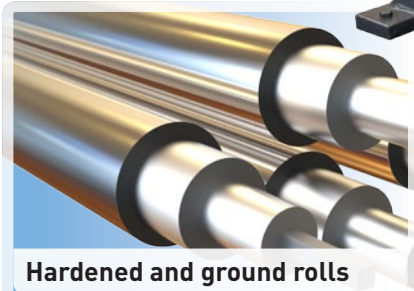

Hardened and ground rolls



Art.no.	8263	-1035	-1050	-1060	-1230	-1240	-1250	-1525	-1535	-1540	-1715	-1725	-1730	-2010	-2015	-2020
Capacity		10/35	10/50	10/60	12/30	12/40	12/50	15/25	15/35	15/40	17/15	17/25	17/30	20/10	20/15	20/20
Working length (w)	mm	1020	1020	1020	1270	1270	1270	1525	1525	1525	1770	1770	1770	2020	2020	2020
Max sheet thickness (400 N/mm ²) (t)	mm	3,5	5,0	6,0	3,0	4,0	5,0	2,5	3,5	4,0	1,5	2,5	3,0	1,0	1,5	2,0
Diameter of rolls (ø)	mm	90	100	110	90	100	110	90	100	110	90	100	110	90	100	110
Net weight	kg	295	410	460	330	450	510	355	490	560	400	530	610	435	570	660
OPTIONS:																
Hardened and ground rolls	826377	-1035	-1050	-1060	-1230	-1240	-1250	-1525	-1535	-1540	-1715	-1725	-1730	-2010	-2015	-2020
Cone bending equipment	8263	-2605	-2605	-2605	-2605	-2605	-2605	-2605	-2605	-2605	-2605	-2605	-2605	-2605	-2605	-2605

Nosstec AB, Kristineholmsvägen 12, 441 39 Alingsås, SWEDEN

Tel: +46 (0)512 - 298 85 • Fax: +46 (0)512 - 298 89 • E-mail: info@nosstec.se • Web: www.nosstec.se

For copyright reasons all reproduction and copying of the texts, photos, tables and illustrations is prohibited without written permission from Nosstec AB.